



丝杆电机 Lead screw motors

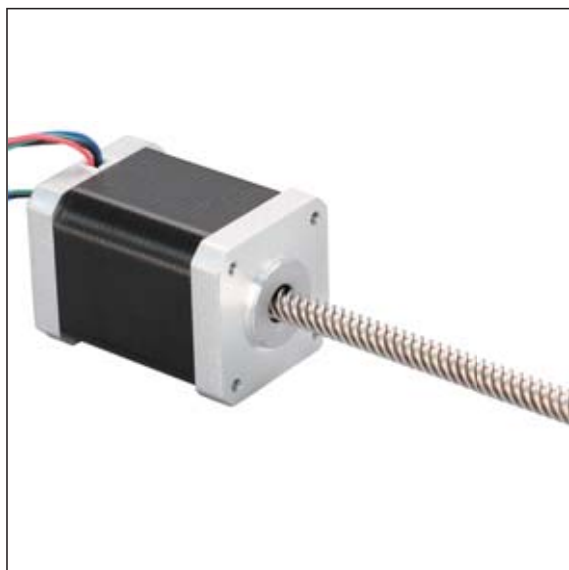

产品特性 Product features

- 丝杆与电机集成设计降低成本
 - 配置长度 300 毫米引出绞线
 - 性价比高、工作效率优异
 - 运行平稳、噪音低
 - 额定电压 24-60 伏
 - 电机外壳防护等级 IP40
 - 选配塑料丝杆螺母 P328-P344
- Integrated design of lead screw and motor for cost reduction
 - With 300mm stranded wires
 - Cost-effective and high-efficiency performance
 - Smooth running motion and low-noise operation
 - Rated voltage: 24-60 V
 - IP rating - motor housing IP40
 - Optional plastic screw nuts P328-P344

标准规格 Standard specifications

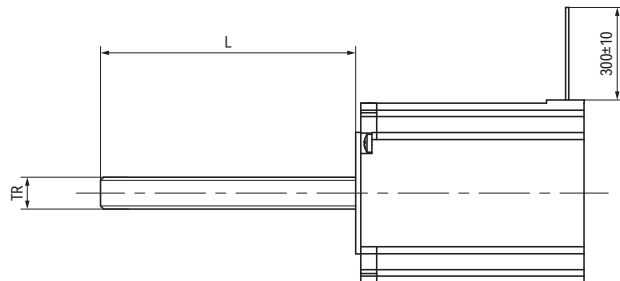

产品编码 Part No.:

MOT-ST11-10x12R-0000-ES

- 不锈钢Stainless steel
- 丝杆有效长度Lead screw length
- R-右旋Right
- 丝杆型号Screw type
- 步进电机Stepper motors

丝杆编码 Lead screw	直径 Outer diameter [mm]	导程 Lead [mm]	距螺 Pitch [mm]	头数 Numbel of threads [pcs]	MOT-ST11 L max. 300	MOT-ST17 L max. 500	MOT-ST23 L max. 500	MOT-ST34 L max. 500
TLS-8×1.5R-N1	8	1.5	1.5	1		●	●	
TLS-10×2R-N1	10	2	2	1		●	●	
TLS-10×3R-N1	10	3	3	1		●	●	
TLS-10×4R-N2	10	4	2	2		●	●	
TLS-12×3R-N1	12	3	3	1			●	
TLS-12×6R-N2	12	6	3	2			●	
TLS-16×4R-N1	16	4	4	1				●
TLS-16×8R-N2	16	8	4	2				●
HLS-6.35×6.35R-N4	6.35	3.35	1.588	4	●	●		
HLS-6.35×12.7R-N6	6.35	12.7	2.12	6	●	●		
HLS-6.35×25.4R-N8	6.35	25.4	3.175	8	●	●		
HLS-8×10R-N4	8	10	2.5	4		●	●	
HLS-8×15R-N10	8	15	1.5	10		●	●	
HLS-10×12R-N4	10	12	3	4		●	●	
HLS-10×25R-N8	10	25	3.125	8		●	●	
HLS-12×25R-N8	12	25	3.125	8		●	●	